


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2014-01-24

Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperature: -40°C to +105°C
 Soldering temperature: +255°C

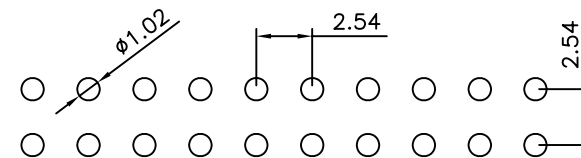

P.C.B LAYOUT

PM	1	11	22	XXX	D	XX	X	N	Y	045
P/N PM=Female Header	Pitch 1=2.54	H 11=11.0mm	Product Type 22=Dual Housing Dual Rows	PIN位总数 04~80P	Right Angle Type D=DIP	Surface Plating SN Tin100u" GF Gold Flash G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	Housing Material A=PBT C=PA6T	Housing Type N=Normal	Terminal Type Y=Y Type	Terminal PC/PW

nicetyconn® SHENZHEN CHUANG HUI CHENG TECHNOLOGY CO., LTD
 Tel: +86-755-27164749 Http://www.nicetyconn.com

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2014-01-24	PH 2.54 Female Header Y Type H 13.5 PC 104 Terminal Dual Housing Dual Rows
X.XXX ±0.10	DRAWN :		PART NO: PM1122XXXDXXXNY045
X.XX ±0.20	CHECKED :		DRAWING NO: PM1122DY050
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			